


# dBOX310-135

AMD Embedded R-Series SoC  
Gaming Board

## Features

- High-end All-In-One AMD gaming platform
- GLI verified TrustedBoot and TrustedData
- Supports 9-bit serial port for SAS 6.02
- Lifetime long-term supply

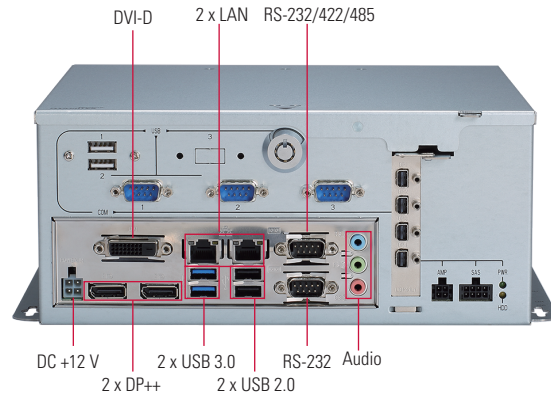

## System

CPU	AMD Embedded R-Series SoC, formerly codenamed- "Merlin Falcon"
Memory	2 x DDR4 SO-DIMM up to 2133 MHz, max. up to 32 GB
BIOS	AMI -uEFI TrustedBoot, secure hash and public key algorithm validation
Watchdog timer	1 sec to 255 min
Expansion	1 x PCIe x16 slot (supports Low-Profile card / PCIe X8 signal only)
Power Input	DC +12 V
Dimensions	240 mm (W) x 210 mm (D) x 105 mm (H)
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Humidity	10 % to 90 %, non-condensing
Security	Anti-clone security - TPM engine - RSA2048 and AES256 hybrid encryption

## I/O

USB	3 x USB 3.0 (1 x internal) 4 x USB 2.0
Serial Interface	2 x RS-232 DB9 (1 x RS-422/485 configurable) 3 x RS-232 (1 x ID003, 2 x ccTalk configurable) 2 x RS-232 (hardware 9-bit supported)
Audio	HD audio 5.1 channels Line-out or stereo 6 W + 6 W audio amplified output
Storage	2 x SATA III, support 1 x 2.5" HDD driver bay 1 x CFast socket via SATA to CFast adapter(optional)
Ethernet	2 x GbE LAN port

## Display

Graphic	AMD Radeon™ HD10000 Series DirectX® 12, OpenGL® 4.2, and OpenCL™ 1.2
Interface	2 x DP++ 1 x DVI-D

\* All specifications and photos are subject to change without notice.



## Gaming Function

Intrusion Detection	8 x intrusion detection (2 x internal, 6 x external) Operates with and without AC Power Logs date/time of last 200 events
Digital Input	32 x protected input 4 x DIP switch
Digital Output	29 x 500 mA/30 V OC output (8 x meter configurable) 3 x 3 A/30 V OC output
NVRAM	4 MB (2 or 8 MB optional) TrustedData, hardware bank mirroring and CRC
Software Support	Windows/Linux sample code and demo program provided SAS 6.02 COM port driver provided

## Software

OS	Windows® 7, 10 Linux kernel 3.x and above version
Gaming API	Windows®/Linux sample code and demo program provided
Others	SAS 6.02 COM port driver provided

## Ordering Information

dBOX310-135-421	AMD Embedded R-Series SoC gaming platform with RX-421 quad-core APU, 2 x DP++, DVI-D, 4 MB NVRAM
-----------------	--



For more information please contact: gaming@axiomtek.com.tw No. 3130-1351801